

MARION COUNTY SURVEYOR'S OFFICE



SECTION CORNER RECORD

DEBRA S. JENKINS
MARION COUNTY SURVEYOR

SEC. 3 TWN. 15_N RNG. 2_E

BRYAN F. CATLIN, PLS
TECHNICAL SUPERVISOR

Date: 5-20-09
Party Chief: Greene
Crew: Taylor / Finney
Type of Marker: Harrison
Method of Establishment: County: History
IN S.P.C. E Zone, NAD 83
Name: 15020301
N: 503 169.447 4(m)
E: 45 047.815 9(m)

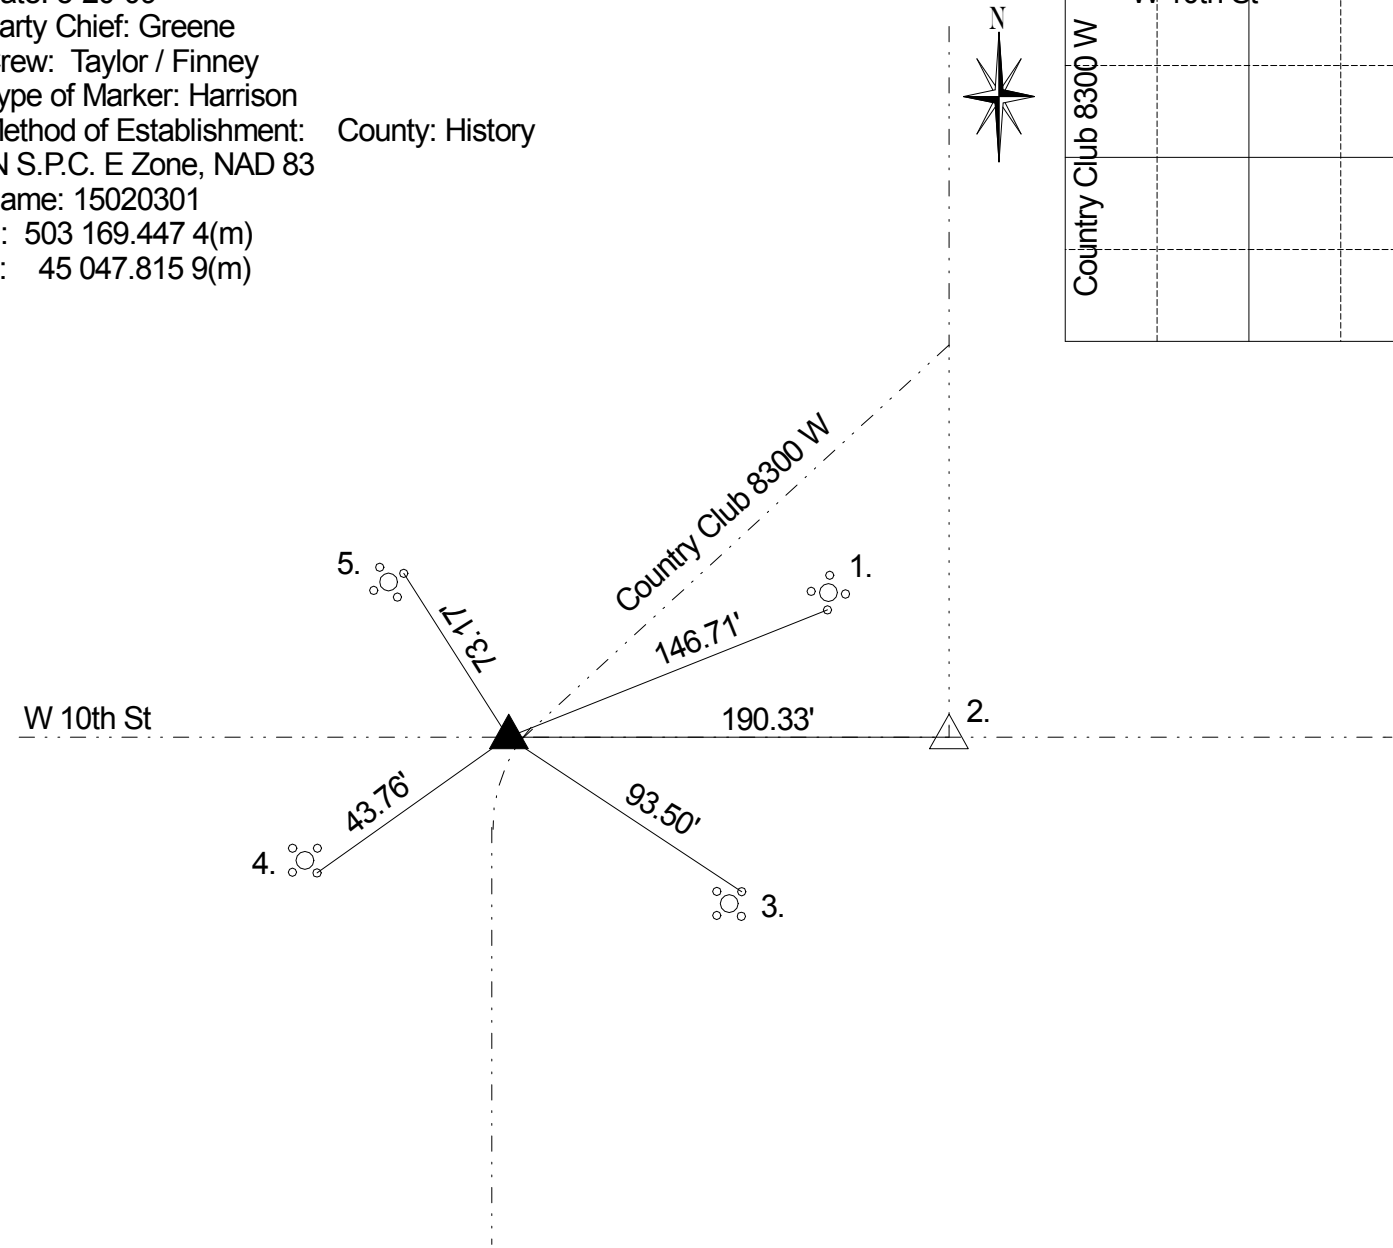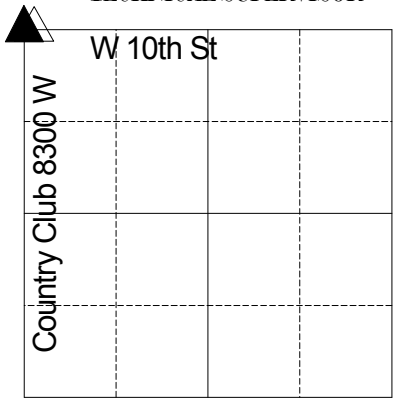

Original post set 1820 by Laughlin with witnesses: 10" beech N 41 E 10 links, 10" ash S 36 W 42 links per Marion County Atlas pg 2. Coyner 4/19-4/21/1900 during survey for NE 4-15-2 called stone fd per Wayne Township Legal Survey Book pg. 88. 3-1958 MCSO called brass plug for NE corner. 10-19-71 Mulryan called a PK nail. 5-28-75 MCSO called 3/4" rebar. 5-5-81 Wilcoxen called same. 9-2-87 Wilcoxen excavated a PK nail 4" down and rebar found 5" down. A #205 Harrison monument was set in place of the rebar. Retied 9-29-1995 by Wilcoxen. Retied 5-10-2000 by Kiste. Retied 1-26-05 by Wilcoxen Retied 5-20-09 by Greene.

REF.	DISTANCE	DESCRIPTION
1.	146.71'	cut 'x' S bolt aluminum signal pole
2.	190.33'	Due E to Harrison at SW 34-16-2 (16023407)
3.	93.50'	cut 'x' NE bolt aluminum signal pole
4.	43.76'	cut 'x' SE bolt aluminum signal pole
5.	73.17'	cut 'x' NE bolt aluminum signal pole